

规 格 书

SPECIFICATION LETTER

产品名称： 烤箱灯泡

PRODUCT NAME OVEN LAMP

规 格： E14/25 230V-240v 15W 300℃

SPECIFICATION: E14/25 230V-240v 15W 300℃

发行日期： 2006 年 5 月 29 日

PUBLISHING DATE MAY 29, 2006

发放者： 德清县万顺达化工新材料有限公司

PUBLISHER: Deqing WSD Chemical & New Materials Co.,Ltd.



德清县万顺达化工新材料有限公司

Deqing WSD Chemical & New Materials Co.,Ltd.

地址： 中国浙江省德清县乾元镇务前街 106 号

Address: No.106 Wuqian Street, Qianyuan Town, Deqing County,

电话 tel: 0086-572-8315278 传真 fax: 0086-572-8422918

网址: <http://www.wsd.cn>

烤箱指示泡规格书

SPECIFICATION OF OVEN LAMP

本规格书适用于烤箱专用指示灯泡。

This specification covers specially oven lamp.

1 型号和外观

Type and Out-view

1.1 规格：230V-240v 15W;

Specs: 230V-240v 15W;

1.2 玻壳型号：T22

Bulb type:T22

1.3 灯头型号：E14/25


Base type: E14/25

1.4 灯泡的玻壳应洁净，透明。无影响使用的缺陷存在。

Lamp's bulb should be clear, transparence, and has no any defect.

1.5 尺寸图如下：

Out-view drawing:

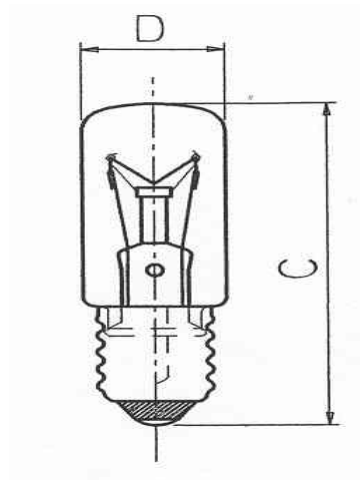

D	22±0.8MM
C	48±1MM

2 物理性能

Physical character.

2.1 灯头与玻壳的同轴度偏差不超过 1.5MM。

The slope between base and bulb is less than 1.5MM.

2.2 灯头与玻壳的固定牢固，扭矩应超过 1.15N • M.

Base fixed with bulb firmly, torque exceeds. 1.15N • M

3 电气性能

Electric character

3.1 额定电压，额定功率

Rated Voltage, Rated Power

额定电压：230V；额定功率：15W；功率偏差：15W±10%

Rated Voltage:230V; Rated Power: 15W; Power deviation:15W±10%

3.2 电气寿命

Electric Life

额定电压下寿命在≥1000h。

Electric Life under rated voltage: Above≥1000h.

3.3 光通量(LM):75±15LM(光通量为参考值)。

Luminous flux :75±15LM (Luminous flux is a date of reference)

3.4 在额定电压下，灯泡通电 1 秒，断电 1 秒，连续通断平均不少于 5 万次。

Under rated voltage, turn on 1 second, turn off 1 second, the continuous on and off not less than 50000 times.

4 环境试验

Environment Test

4.1 非燃点状态下，灯泡在承受 300±5℃ 高温≥1000H 后无损坏现象，且能满足功能要求。

Under the turn off status, lamp should endure 300 ± 5 °C high ≥ 1000H temperature and meet function requirements.

4.2 非燃点状态下，灯泡在承受 40±2℃，90—95%RH，24h 后无损坏现象，且能满足功能要求。

Under the turn off status, lamp should endure 40±2 °C, 90—95%RH,24h,and meet function requirements

4.3 非燃点状态下，灯泡在承受 -20±2℃，24h 后无损坏现象，且能满足功能要求。

Under the turn off status, lamp should endure -20± °C,24h,and meet function requirements

4.4 灯泡放在常规包装箱内，从 300mm 高度按 x,y,z 方向向厚度 10mm 木板跌落各一次，无破损，断丝现象，且能满足规格要求。

While lamp is set in box, fall in x,y,z direction From 300mm high to a 10mm thick wood board, and the lamp meet the specification requirements.

5 其他

Others

5.1 灯泡上的标志应清晰，牢固，且包含如下部分：

The logo on the lamp must be clear, firm, and include the following part:

1) 制造厂商标名：WSDCN

Brand name of product: WSDCN

2) 灯泡规格：230V15W

Specification of lamp: 230V15W

5.2 等效寿命试验按如下公式计算：

Count similar life as follow formula:

$$L1=L2 \times \left(\frac{U2}{U1} \right)^{13}$$

其中:

Among the total:

L1: 等效寿命

L2: 测试电压下的寿命

L1: Equivalent life

L2: Excessive bearing life

U2: 测试电压

U1: 额定电压

U2: Excessive voltage

U1: Rated voltage